


BO'S BACK DOOR

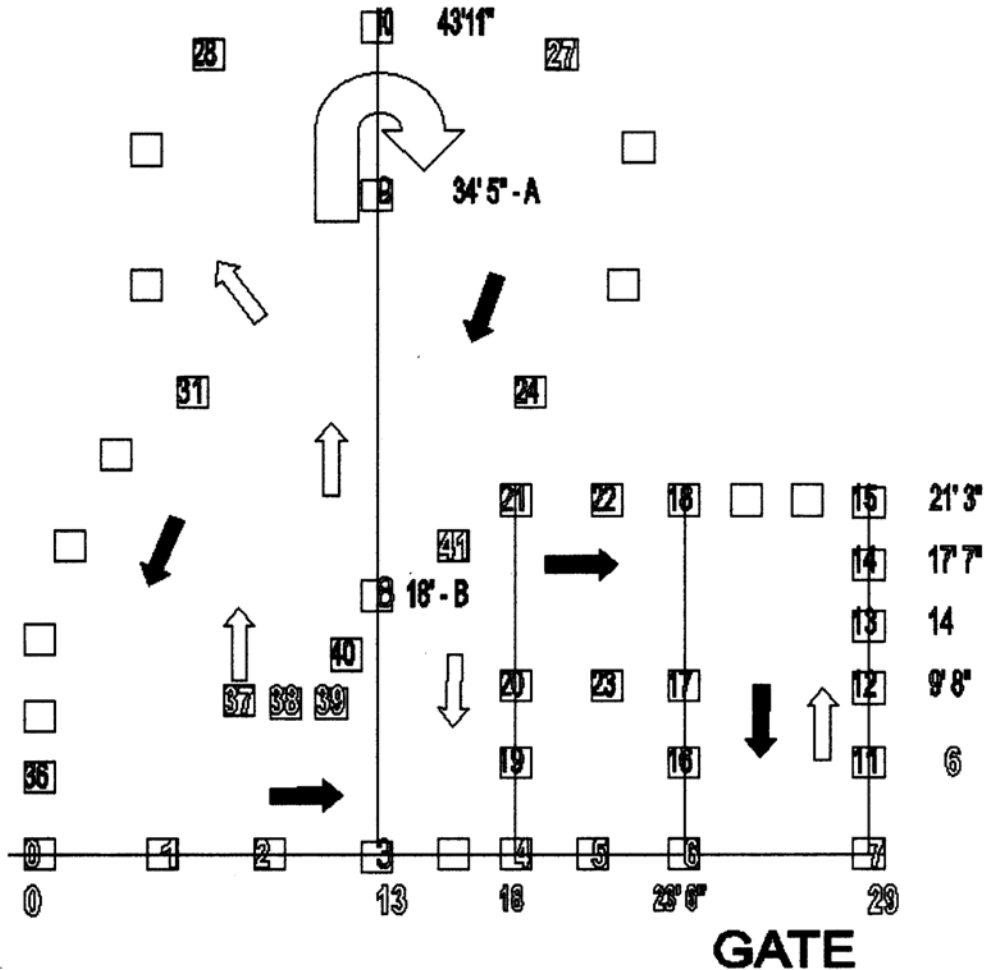

MEASUREMENTS

- 1) Four 50' tapes and 42 cones are required to complete this pattern. Measurements are cen
- 2) Place base line (#1) at bottom of pattern and mark "0" with a nail. Extend tape to 30'.
- 3) Place center line (#2) at the 13' mark of base line. Square the two lines.
- 4) Once lines are square, mark the following:

BASE: 0, 4', 8', 13', 18', 20'9", 23'6" and 29'

CENTER: 18" (cone B), 34'5" (cone A) and 43' 11" (cone 10)

- 5) Place riser line (#3-outside gate) at the 29 mark. Square with base and center then mark:
6', 9' 8", 14', 17'7", and 21'3"
- 6) Place rise line (#4-inside gate) at the 23'6" mark and square with base and center, the ma
6', 9'8", and 21'3"
- 7) Place final rise line (#5) at the 18' mark, square then mark:
6', 9'8" and 21'3"
- 8) The remainder of the measurements are triangulated from Cone A & B located on the cent

Cone #	A	B
24	9'6"	9'4"
25	9'6"	18'
26	9'6"	23' 11"
27	9'6"	26'
28	9'6"	24'9"
29	9'6"	20'4"
30	9'6"	15'7"
31	9'6"	10'4"
32	14'5"	9'5"
33	20'	11'
34	24'10"	13'8"
35	29'9"	16'11"
36	33'5"	19'4"
37	25'3"	10'3"
38	24'8"	9'3"
39	24'3"	8'2"
40	20'6"	4'2"
41	14'2"	3'9"